

Job Name:	Date:
System Reference:	



MVZ-A36AA7

SPECIFICATIONS:

Rated Capacity*		
Cooling	Btu/h	36,000
Heating at 47° F	Btu/h	40,000

*Rating Conditions per AHRI Standard (Rated data is determined at a fixed compressor speed):
 Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB
 Cooling | Outdoor: 95° F (35° C) DB / 75° F (24° C) WB
 Heating at 47°F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB
 Heating at 47°F | Outdoor: 47° F (8° C) DB / 43° F (6° C) WB

For data on specific indoor units (all ducted, all non-ducted, and both ducted and non-ducted) combinations, see the MXZ Technical and Service Manual

Electrical Power Requirements	208 / 230V, 1-Phase, 60 Hz	
-------------------------------	----------------------------	--

Minimum Circuit Ampacity (MCA)	A	4.13
--------------------------------	---	------

Voltage		
---------	--	--

Indoor - Outdoor S1-S2	AC 208 / 230V	
Indoor - Outdoor S2-S3	+/- 24VDC	

External Static Pressure	In. WG	0.30 - 0.50 - 0.80
--------------------------	--------	--------------------

External Finish	High-gloss polyester powder coated	
-----------------	------------------------------------	--

External Dimensions (H x W x D)	In.(mm)	54-1/4 x 21 x 21-5/8 (1,378 x 534 x 548)
---------------------------------	---------	---

Net Weight	Lbs.(kg)	141 (64)
------------	----------	----------

Sound Pressure Level (Low-Mid-Hi)		
-----------------------------------	--	--

Cooling	dB(A)	35 - 39 - 43
Heating		35 - 39 - 43

Airflow Rate (Low-Mid-Hi)		
---------------------------	--	--

Cooling (Dry)	CFM	767 - 931 - 1095
Heating		767 - 931 - 1095

Refrigerant Piping		
--------------------	--	--

Liquid (High Pressure)	In.(mm)	3/8 (9.52)
Gas (Low Pressure)		5/8 (15.88)

Refrigerant	R410A	
-------------	-------	--

Connection Method	Flared	
-------------------	--------	--

GENERAL FEATURES:


- Multi-position air handling unit
- Multi-Position installation without any additional kits
- Quiet operation
- Selectable external static pressure settings with capabilities up to 0.80 In. W.G.
- Auto fan speed control: Low, Medium, High
- Indoor unit powered from outdoor unit using A-Control (Optional)
- Auto restart following a power outage
- Limited warranty: five years parts and seven years compressors

ACCESSORIES:

- Mini-Condensation Pump (SI30-115/230)
- Maxi Blue Diamond Condensate Pump 230V (X87-721)

DIMENSIONS: MVZ-A36AA7

Unit:mm;(in.)
Note 1. Keep the service space for maintenance at the front.

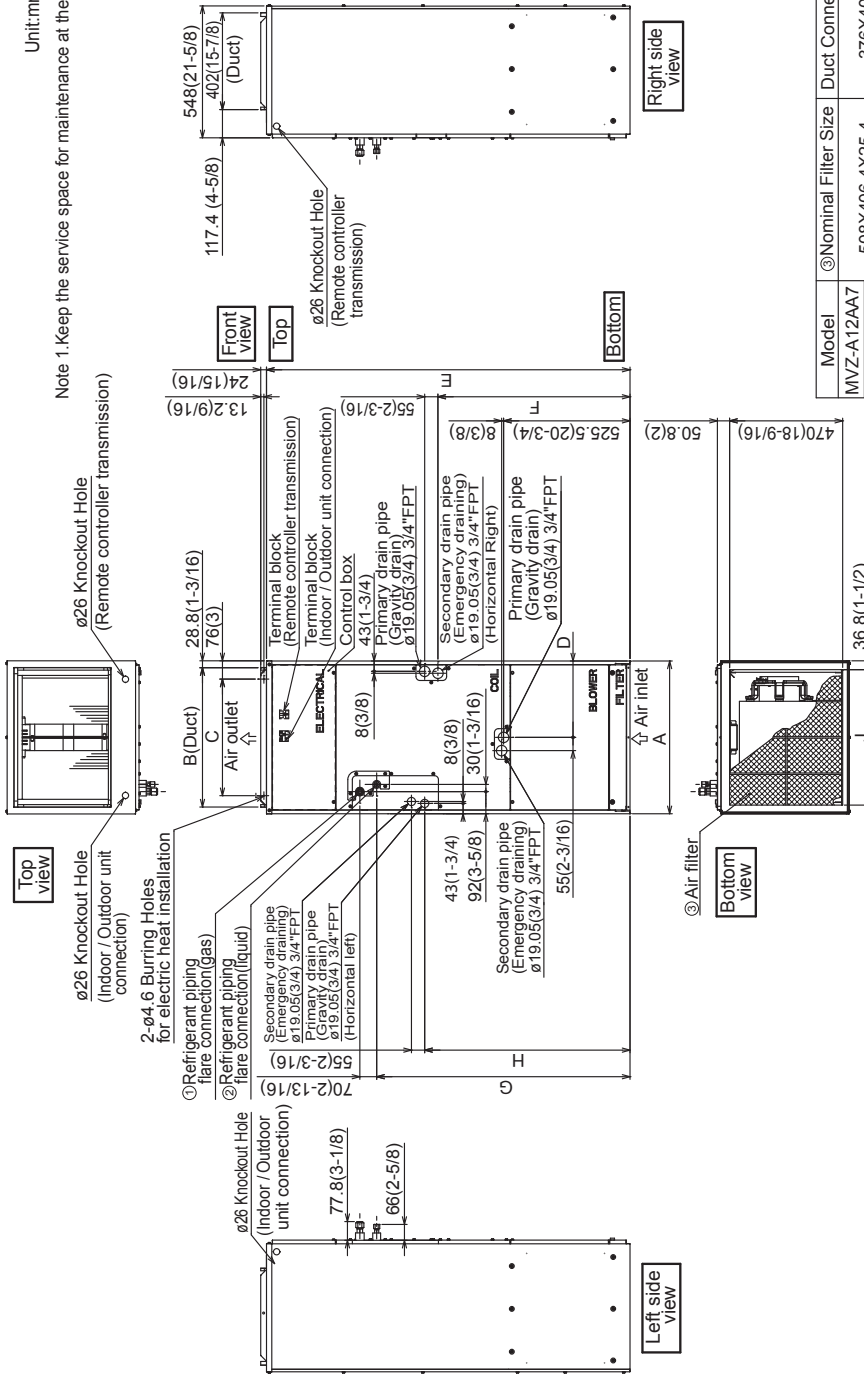

Model	③Nominal Filter Size	Duct Connection
MVZ-A12AA7	508X406.4X25.4 (20X16X1)	376X402 (14-13/16X15-7/8)
MVZ-A18AA7	508X406.4X25.4 (20X16X1)	477X402 (18-13/16X15-7/8)
MVZ-A24AA7	508X406.4X25.4 (20X16X1)	477X402 (18-13/16X15-7/8)
MVZ-A30AA7	508X406.4X25.4 (20X16X1)	477X402 (18-13/16X15-7/8)
MVZ-A36AA7	508X406.4X25.4 (20X16X1)	477X402 (18-13/16X15-7/8)

Model	A	B	C	D	E	F	G	H	J	① Gas pipe	② Liquid pipe
MVZ-A12AA7	432	376	281	224	1275	680	823	735.5	360	ø12.7 (1/2)	ø6.35 (1/4)
MVZ-A18AA7	534	477	382.6	266.5	1378	737	953.5	792	461	ø15.88 (5/8)	ø9.52 (3/8)
MVZ-A24AA7	534	477	382.6	266.5	1378	737	953.5	792	461	ø15.88 (5/8)	ø9.52 (3/8)
MVZ-A30AA7	534	477	382.6	266.5	1378	737	953.5	792	461	ø15.88 (5/8)	ø9.52 (3/8)
MVZ-A36AA7	534	477	382.6	266.5	1378	737	953.5	792	461	ø15.88 (5/8)	ø9.52 (3/8)



COOLING & HEATING

1340 Satellite Boulevard, Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

