



With Built-In Surge Suppression

Features

- Protects against over and under voltage, rapid short cycling caused by transients, and high-power surges
- Ideal for mini-splits or other condensing units
- Easy to view, backlit digital display
- Bank of five L-L Surge Arresters
- Built-in 40A Contactor
- Waterproof, NEMA-rated 3R enclosure for outdoor use
- Easy installation and setup



*Ideal for Protecting
Mini-Splits!*

UL[®]
E365756

Specifications

User Adjustable Settings

- **Voltage Setpoint:** 207-253 VAC
- **Anti-Short Cycle Delay:** 0.5-10 Minutes
- **Number of Surge Arresters Required for Operation:** 0-5
- **Number of Retries:** 1-5, Auto

Inputs

- **Line Voltage:** 230 VAC
- **Frequency:** 50-60 Hz
- **Accuracy:** +/- 2%, User Calibration


Output

- **Type:** Contactor
- 2-Pole
- **Contactor Ratings:** 40A FLA, 240A LRA

Mechanical

- 3R Outdoor Enclosure
- **Dimensions:** 8"L x 8"W x 4"H

Wiring Diagrams

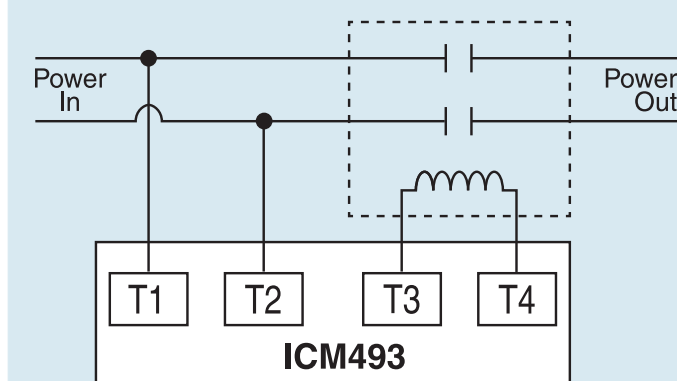

Replaces

- N/A